



TSL-RGB



24.4"

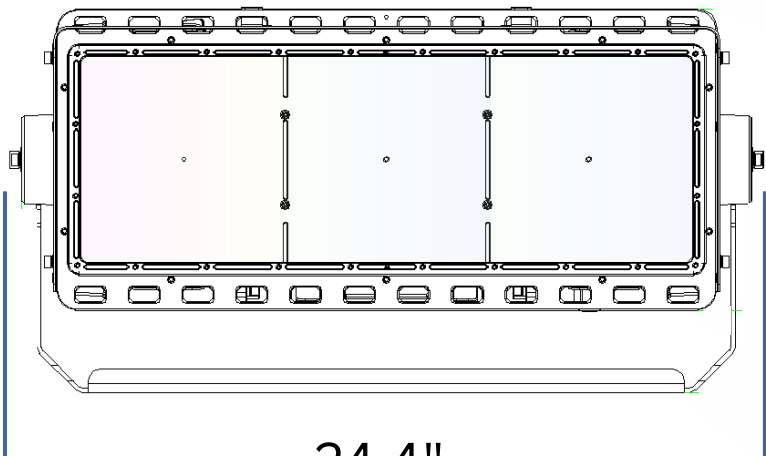

FIXTURE

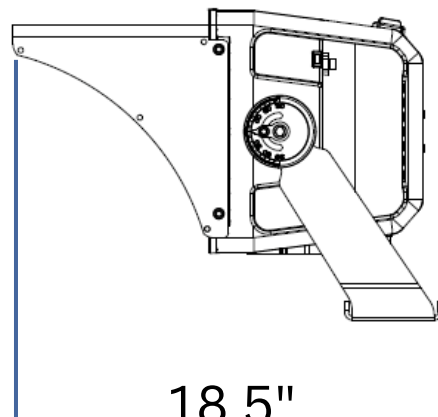

18.5"

TSL-RGB

TECHNICAL DATA

SYSTEM WATTS	750w(250wR, 250wG, 250wB)
LUMEN OUTPUT	43,337(4,700R, 37,310G, 2,880B)
EFFICACY	58 LM/W(18.8R, 149.2G, 11.5B)
EPA	1.8*
WEIGHT	47lbs
BEAM ANGLE	M
POWER FACTOR	0.99
CCT	625-740nm R, 492-577nm G, 440-475nm B
CRI	90.2 RGB
INPUT VOLTAGE	120-277 / 277-480VAC, 50/60Hz
INPUT PROTECTION	10KV Current Surge
DRIVER	Integral
IP RATING	IP66
OPERATING TEMP RANGE	-40° C to +50°C
HOUSING MATERIAL	Aluminum, Powder Coated
CONTROLS	DMX, DALI

*EPA at 10° below horizontal