


TSL800W

FIXTURE



Standard Visor

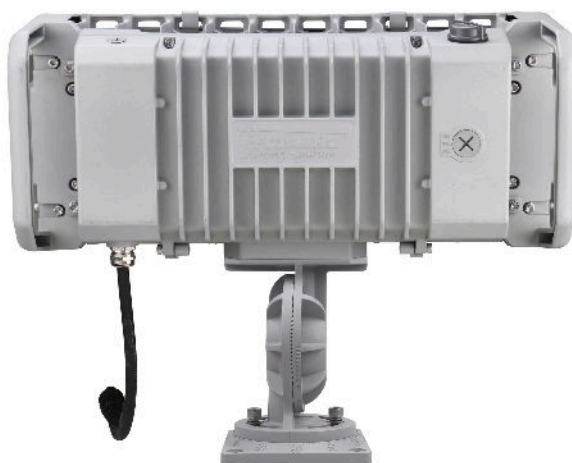

Extended Visor (optional)



## TSL800W

## TECHNICAL DATA


SYSTEM WATTS	800w
LUMEN OUTPUT	113,600
EFFICACY	142 LM/W
LIFE EXPECTANCY	L70 > 138,000h
EPA	1.8*
WEIGHT	45 lbs
BEAM ANGLE	N, M, W, EW
POWER FACTOR	@277v >.99 @480v >.96
CCT	5700K
CRI	>70Ra
INPUT VOLTAGE	200-480v
INPUT PROTECTION	10KV Current Surge
DRIVER	Integral
IP RATING	IP66
OPERATING TEMP RANGE	-40° C to +50°C
HOUSING MATERIAL	Aluminum, Powder Coated
CONTROLS	0-10v, DMX, DALI

\*EPA at 10° below horizontal


TSL800W

VISOR OPTIONS

Standard Visor

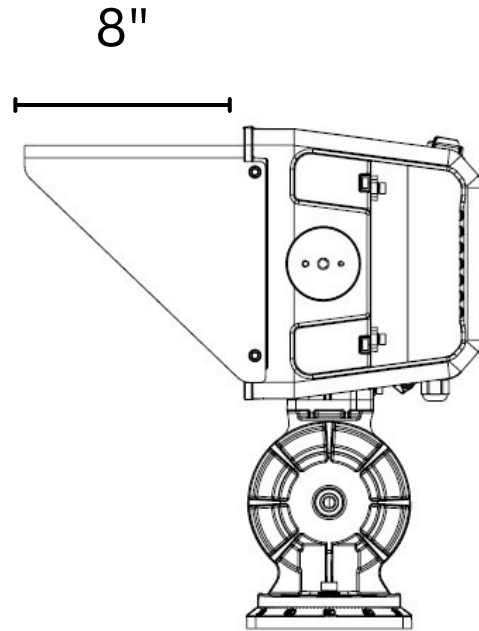

Extended Visor (optional)

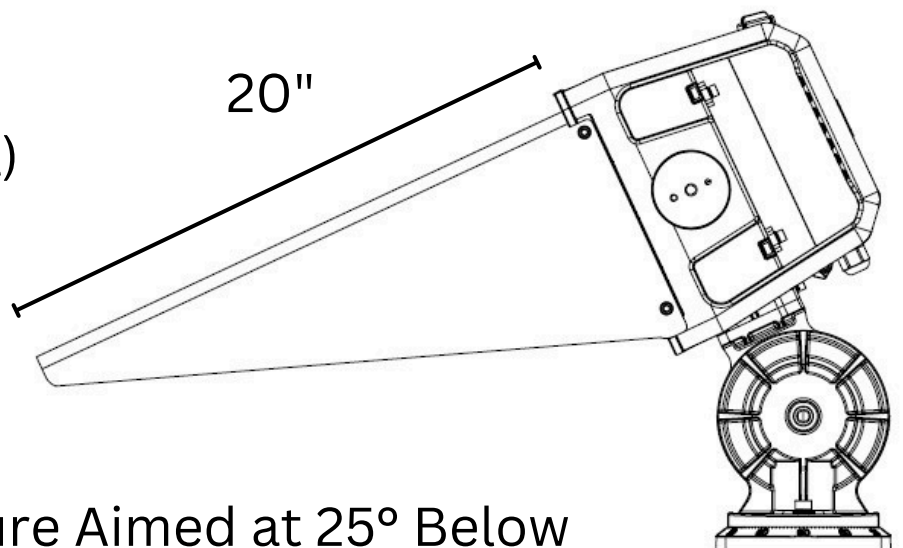

Fixture Aimed at 25° Below  
Horizontal